

**Precise non-contact
temperature measurement
from $-50\text{ }^{\circ}\text{C}$ to $1050\text{ }^{\circ}\text{C}$ in rough
environmental conditions**



Features:

- The new infrared thermometer for hot environmental temperatures up to $250\text{ }^{\circ}\text{C}$ without any need of cooling
- A variety of applications in dryers, ovens, heat treatment lines in the metal and glass industry, paper, plastic and textile manufacturing and semiconductor processing in the temperature range of $-50\text{ }^{\circ}\text{C}$ to $1050\text{ }^{\circ}\text{C}$ and a response time up from 100 ms
- Selectable 10:1 or 2:1 optics, compact sensor head size
- Narrow beam optics allows oblique aiming to avoid material thickness dependent temperature readings
- Monitor box for programming and temperature display
- Analog outputs 0/4–20 mA, 0–5/10 V, thermocouple type K and integrated digital interfaces (optional), USB, RS232, RS485, Modbus RTU, Modbus TCP, Ethernet TCP, Profinet or EtherNet/IP

General specifications

Environmental rating	IP 65 (NEMA-4)
Operating temperature range ¹⁾	$-20\text{ }^{\circ}\text{C}$... $250\text{ }^{\circ}\text{C}$ (sensing head) $-20\text{ }^{\circ}\text{C}$... $85\text{ }^{\circ}\text{C}$ (electronics)
Storage temperature	$-40\text{ }^{\circ}\text{C}$... $250\text{ }^{\circ}\text{C}$ (sensing head) $-40\text{ }^{\circ}\text{C}$... $85\text{ }^{\circ}\text{C}$ (electronics)
Operating air humidity range	10–95 %, non condensing
Vibration (sensor)	IEC 60068-2-6 (sinus shaped) IEC 60068-2-64 (broadband noise)
Shock (sensor)	IEC 60068-2-27 (25G and 50G)
Weight	40 g (sensing head) / 420 g (electronics)

Electrical Specifications

Output / analog (2x)	0 / 4 – 20 mA, 0 – 5 / 10 V, thermocouple K, alarm
Output / alarm	24 V / 50 mA (open collector)
Relay outputs (optional)	2 x 60 V DC / 42 V AC _{eff} ; 0.4 A; optically isolated
Outputs / digital	built-in USB-interface, Optional EtherNet/IP, Profinet, Ethernet TCP / Modbus TCP, Modbus RTU, RS485, RS232 interface or relay outputs (2 x optically isolated)
Output impedances	mA max. 500 Ω (with 8 – 36 V DC) mV min. 100 k Ω load impedance thermocouple 20 Ω
IO Pins (3x)	flexible programming as in- or output: external emissivity adjustment, ambient temperature compensation, uncommitted value, trigger (reset of holdfunctions), alarm output (open collector 24 V / 50 mA)
Cable length	1 m (standard), 3 m, 8 m, 15 m
Power	8 - 30 V DC 1.2W

Measurement specifications

Measuring Temperature range (scalable via programming keys or software)	$-50\text{ }^{\circ}\text{C}$... $1050\text{ }^{\circ}\text{C}$
Spectral range	8 – 14 μm
Optical resolution (90% energy)	22:1 15:1 2:1
Smallest spot size	0,6 mm @10 mm (LT22 + CF lens)
Measurement uncertainty ^{2), 3), 4), 5), 7)}	$\pm 1\text{ }^{\circ}\text{C}$ or $\pm 1\text{ }^{\circ}\text{C}$
Repeatability ^{2), 3), 4), 5), 7)}	$\pm 0.1\text{ }^{\circ}\text{C}$ or $\pm 0.1\text{ }^{\circ}\text{C}$
Temperature resolution (display)	0.1 K
NETD ^{4), 5), 6)}	typically: 45 mK
Response time	115 ms (90 %)
Emissivity/ Setting (adjustable via programming keys or software)	0.05 – 1.100
Transmissivity/ Setting (adjustable via programming keys or software)	0.05 – 1.100
Signal processing (parameter adjustable via programming keys or software, respectively)	Peak hold, valley hold, average; extended hold function with threshold and hysteresis
Software / App	IR Mobile App / Optris CompactPlus Connect


- 1) The LCD displays capacity may be limited at ambient temperatures below $0\text{ }^{\circ}\text{C}$
- 2) Whichever is greater
- 3) $T_{\text{obj}} > 0\text{ }^{\circ}\text{C}$
- 4) $\varepsilon = 1$
- 5) Response time = 200ms
- 6) $T_{\text{obj}} = 25\text{ }^{\circ}\text{C}$
- 7) at ambient temperature $23 \pm 5\text{ }^{\circ}\text{C}$

optris CTihot LT

Optical specifications


10:1 optics

Optics: SF D:S: 10:1

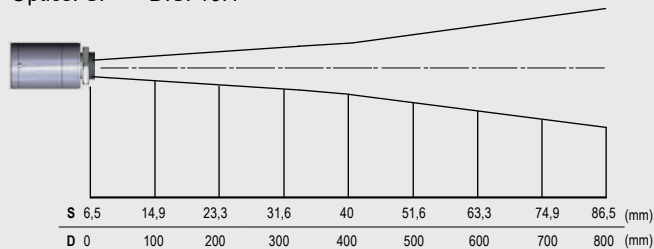


2:1 optics

Optics: SF D:S: 2:1

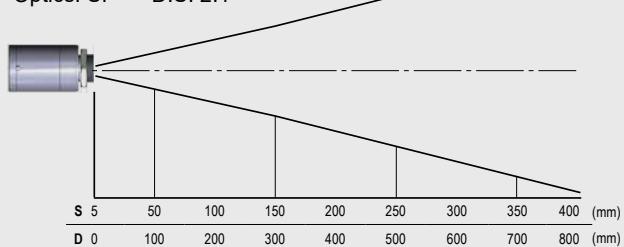

Optics: CF1 | D:S: 10:1

3,0mm@ 30mm | D:S (far field) = 3:1

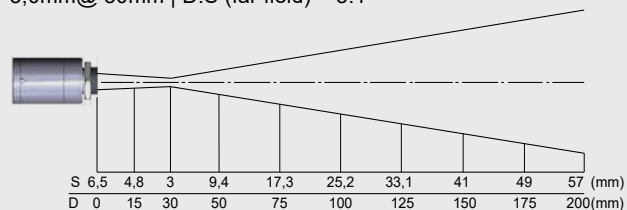


More optical data: <https://optris.com/optris-calculator/>



Dimensions (in mm)

Electronics

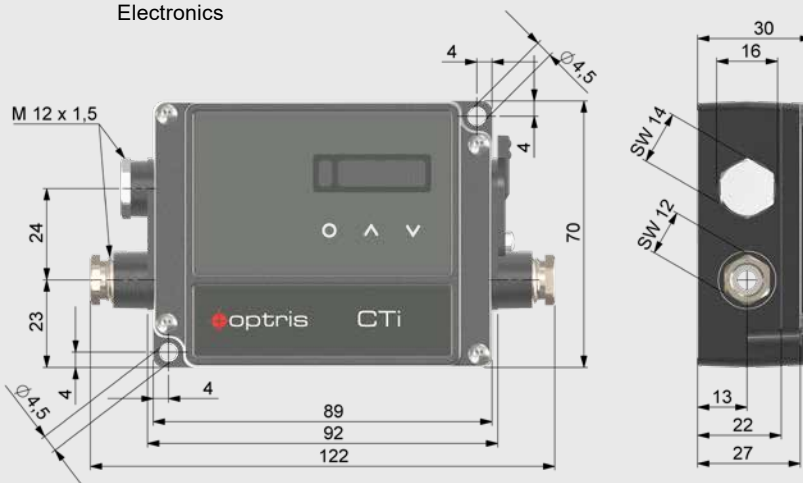

Sensing head
with Massive housing

